



# Outdoor Infrared Patio Heaters


By Infrared Dynamics

### SUNPAK CLASSIC

**Model S25 (25,000 BTU)**

**Model S34 (34,000 BTU)**

Black Hi-Temp Powder Coated Paint.

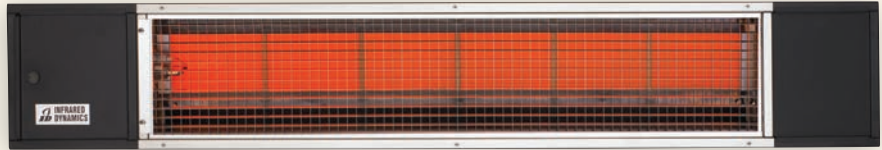

### SUNPAK CLASSIC

**Model S25 (25,000 BTU)**

**Model S34 (34,000 BTU)**

Shown with optional #12020 Series 304 Stainless Steel Fascia.


Optional fascias are also available in Gloss Black and Antique Bronze.

### SUNPAK CLASSIC

**Model S25 S (25,000 BTU)**

**Model S34 S (34,000 BTU)**

Commercial Grade 304 Stainless Steel.

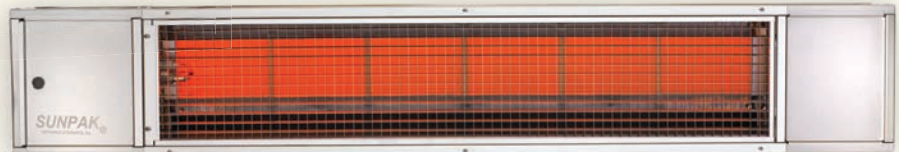

### SUNPAK CLASSIC

**Model S25 (25,000 BTU)**

**Model S34 (34,000 BTU)**

Shown with optional #12020-3 Antique Bronze Fascia.

Optional fascias are also available in Gloss Black and Antique Bronze.

### SUNPAK TSR (TWO STAGE REMOTE)

**Model S34 B TSR Black**

**Model S34 S TSR Stainless**

**(Two Stage Burner can operate at 25,000 or 34,000 BTU with Remote/Wall Switch)**

Shown with optional #12020 Series 304 Stainless Steel Fascia.

Optional fascias are also available in Gloss Black and Antique Bronze.



For TSR only



### SUNPAK TSH (TWO STAGE HARD WIRED)

**Model S34 B TSH Black**

**Model S34 S TSH Stainless Steel**

**(25,000 or 34,000 BTU)**

**Hard Wired with Duplex Switch**

Shown with optional 12020 Stainless Steel Fascia.

Optional fascias are also available in Gloss Black and Antique Bronze.



On-Off/Hi-Lo Duplex switch is included for easy control of Sunpak TSH





# Outdoor Infrared Patio Heaters

By Infrared Dynamics

Just because the sun goes down or the weather unexpectedly turns chilly doesn't mean your outdoor dining, entertaining, or outdoor event has to stop. You can comfortably and efficiently warm your outdoor dining and entertaining areas and extend your outdoor entertaining season for several months with our great line-up of **Sunpak** Patio Heaters. **Sunpak** Outdoor Infrared patio heaters are produced by **Infrared Dynamics**, the recognized leader in the outdoor comfort heating industry. Produced with Pride in the USA, Since 1966.

**Sunpak** heaters are simple to operate and use draft free and highly energy efficient infrared radiant energy just like the sun's warming rays. **Sunpak** heaters warm objects rather than trying to inefficiently heat the air. Each heater will heat about a 12ft x 12ft area depending primarily on wind conditions. **Sunpak** heaters have been installed world-wide in thousands of discerning residential and premium commercial installations.

**Sunpak** heaters come with either a single stage output which can be controlled with a standard wall switch (S25 and S34) or dual stage output controlled with a hand held remote or "On-Off-Hi-Low" wireless wall control (Model TSR Only). Our newest Model TSH (Twin Stage Hard Wired) unit can be hard wired with two stage duplex control (included). All **Sunpak** heaters are CSA Design Certified and are equipped for clean burning, cost effective, and highly efficient Natural Gas or Propane fuels. Please consult your local building codes for proper installation and safety requirements. **Sunpak** heaters are design certified for outdoor use and outdoor installations only.

- Fully Automatic On/Off Control System
- High Efficiency Ceramic Infrared Burner System
- Direct Spark Ignition with Auto Re-light & Flame Sensor System
- Sunpaks can be ceiling or wall mounted
- Available in 25,000 or 34,000 BTU Models or Dual Stage "TSR" Remote Controlled Units & "TSH" Hard Wired Units
- Available in High Temp Powder Coated Aluminized Steel (Black) or "Series 304" Commercial Grade Stainless Steel
- Optional Gloss Black, Antique Bronze, or Stainless Steel Fascia trims for all models
- Produced with Pride in Yorba Linda, California, USA

### Specifications:

|                    |  |            |                     |            |                      |
|--------------------|--|------------|---------------------|------------|----------------------|
| Measurements:      | 48" L x 8" H x 8" D  |            |                     |            |                      |
| Mounting Options:  | Ceiling or Wall  |            |                     |            |                      |
| Approx. Coverage:  | 12' x 12' with minimal wind and at sea level   |            |                     |            |                      |
| Clearances:        | All Models   | Side       | Rear                | Ceiling    | Below                |
|                    | Horizontal:  | 24"        | 17"                 | 13"        | 48"                  |
|                    | 30 Deg Max   | 24"        | 8"                  | 18"        | 48"                  |
| Mounting Angles:   | From Horizontal to a maximum 30 Degrees (Except S25 LP Models)   |            |                     |            |                      |
| Shipping Weight:   | S25 & S34 - 55 Lbs. / TSR - 51 Lbs. / TSH 51 Lbs.  |            |                     |            |                      |
| Fuel Types:        | Please Specify Propane or Natural Gas. Minimum Inlet Gas Pressure 6.0" W.C. for Natural Gas and 11.0" W.C. For Propane (LP)  |            |                     |            |                      |
| Certifications:    | CSA (Canadian Standards Association for US & Canada)   |            |                     |            |                      |
| Available Models:  | S25 Black  | 25,000 BTU | S25 Stainless Steel | 25,000 BTU | 24VAC Off/On Control |
|                    | S34 Black  | 34,000 BTU | S34 Stainless Steel | 34,000 BTU | 24VAC Off/On Control |
|                    | <i>S25 &amp; S34 Includes Mounting Brackets and Transformer</i>  |            |                     |            |                      |
|                    | S34 TSH Dual Stage 25,000 and 34,000 BTU input   |            |                     |            |                      |
|                    | All TSH Models include mounting brackets, 24V transformer, and Duplex Wall switch  |            |                     |            |                      |
|                    | S34 TSR Dual Stage 25,000 and 34,000 BTU Input   |            |                     |            |                      |
|                    | <i>Includes Mounting Brackets, Power Adapter (120 VAC to 7.5 VDC), pre-programmed hand held remote and pre-programmed Wireless Wall Mounted "ON-OFF-HI-LO" wall switch included.</i> |            |                     |            |                      |
| Warranty:          | 1 Year Parts & 3 Years Ceramic Burners-Residential<br>1 Year Commercial Parts Warranty   |            |                     |            |                      |
| Country of Origin: | USA  |            |                     |            |                      |



DEFINING THE OUTDOOR GRILLING & COMFORT HEAT EXPERIENCE

SINCE 1966

2641 Du Bridge Ave., Irvine, CA 92606  
Phone: 1-949-474-3070  
Fax: 1-949-474-0559  
info@aeicorporation.com  
www.aeicorporation.com

